

Stieber GFR Self-Contained Freewheels

FEATURES & BENEFITS


- High overrunning outer race speeds
- Various options available (flanges, torque arms or couplings)
- Atex Certification on demand
- High quality radial lip seal
- Customization on demand
- Covers allow on site selection of rotation direction
- Special sealings and corrosion protection available to succeed in the harshest environments, even submerged!
- German engineering excellence
- First class technical support



AT A GLANCE

Types	Applications groups	Type of support	Overrunning Clutch	Indexing Clutch	Backstop	Bore range-diameter mm	Torque range Nm	Overrunning Speed inner race	Overrunning Speed outer race	Lubrication
GFR-GFRN	Self-contained clutches: Sealed, covers with integral lubrication. From small to high torques, low to max speeds. Applications in all types of industry.	Bearing Support	●	●	●	12-150	55-70,000	Medium Speed	High Speed	Oil (grease on request)
GFR..F1F2/F2F7			●	●	●	12-150	55-70,000			
GFR..F2F3					●	12-150	55-70,000			
GFR..F3F4					●	12-150	55-70,000		Not Possible	
GFRN..F5F6			●	●	●	12-150	55-70,000			

Maximum OR overrunning speeds

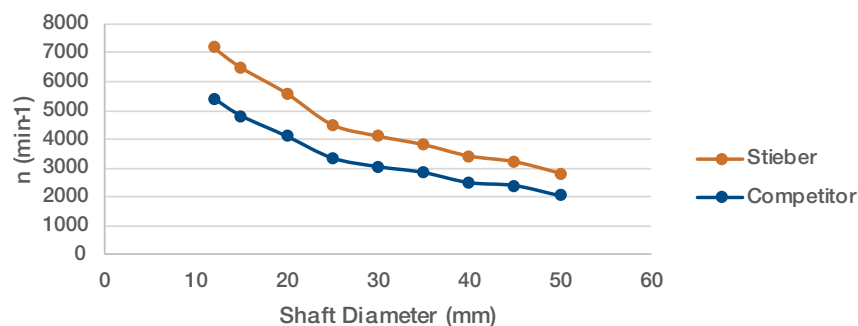

Regal Rexnord

Hatschekstraße 36
69126 Heidelberg - Germany
+49 (0) 6221-30470
stieberclutch.com | regalrexnord.com

The proper selection and application of products and components, including assuring that the product is safe for its intended use, are the responsibility of the customer. To view our Application Considerations, please visit <https://www.regalrexnord.com/Application-Considerations>. To view our Standard Terms and Conditions of Sale, please visit <https://www.regalrexnord.com/Terms-and-Conditions-of-Sale>.